

GrindLazer™ Pro RC813 Hitch Kit

*For installation of hitch/hitch plate and chain mounting bracket.
For professional use only.*

Compatible with GrindLazer Pro RC813 (Models 25M847 & 25N669) and Graco LineDriver™.

Kit Number: 17Z277



Important Safety Instructions

Read all warnings and instructions in this manual and in the GrindLazer Pro RC813 and the LineDriver ES 2000 manuals before using the equipment. Save all instructions.

Hitch and Hitch Plate Installation

1. Attach eye nuts to RC813 frame using a 9/16" wrench and a shaft or pry bar (to hold eye nut in position).
2. Attach ball hitch to ball hitch plate using a 1-1/8" wrench and a 41mm wrench.




3. Attach ball hitch plate to the RC813 frame using provided washers, nuts, and bolts.



Chain Mounting Bracket Installation to LineDriver

1. Use a pair of 9/16" wrenches to remove two bolts from the hitch bracket on LineDriver (leave bracket in place).

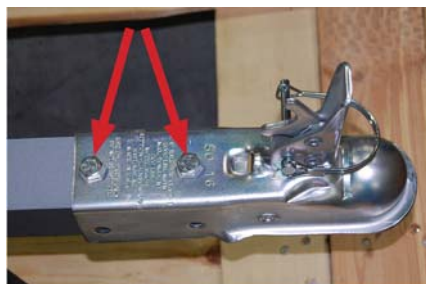


2. Replace bolts with provided 3" long bolts. Do not attach the nuts at the same time.



3. Put chain mounting bracket in place under hitch bracket, using the 3" bolts to locate.




4. Tighten hitch and chain mounting bracket together using the nuts removed from the old bolts in step 1.

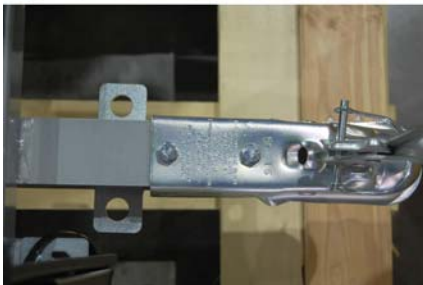

5. Attach the threaded connectors to the chain mounting plate.



6. Attach 13" (10 links) safety chains to the eye nut on the frame and to the hitch bracket on the LineDriver.

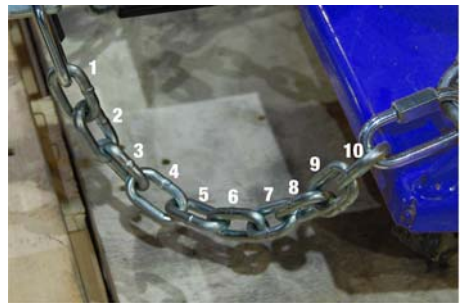

All written and visual data contained in this document reflects the latest product information available at the time of publication.

Graco reserves the right to make changes at any time without notice.

Original instructions. This manual contains English. MM 3A6947

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA

Copyright 2019, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com

Revision A, September 2019