


MARK[®] XV XT[™]

BREAKTHROUGH ELECTRIC PERFORMANCE FOR HIGH-VOLUME APPLICATIONS

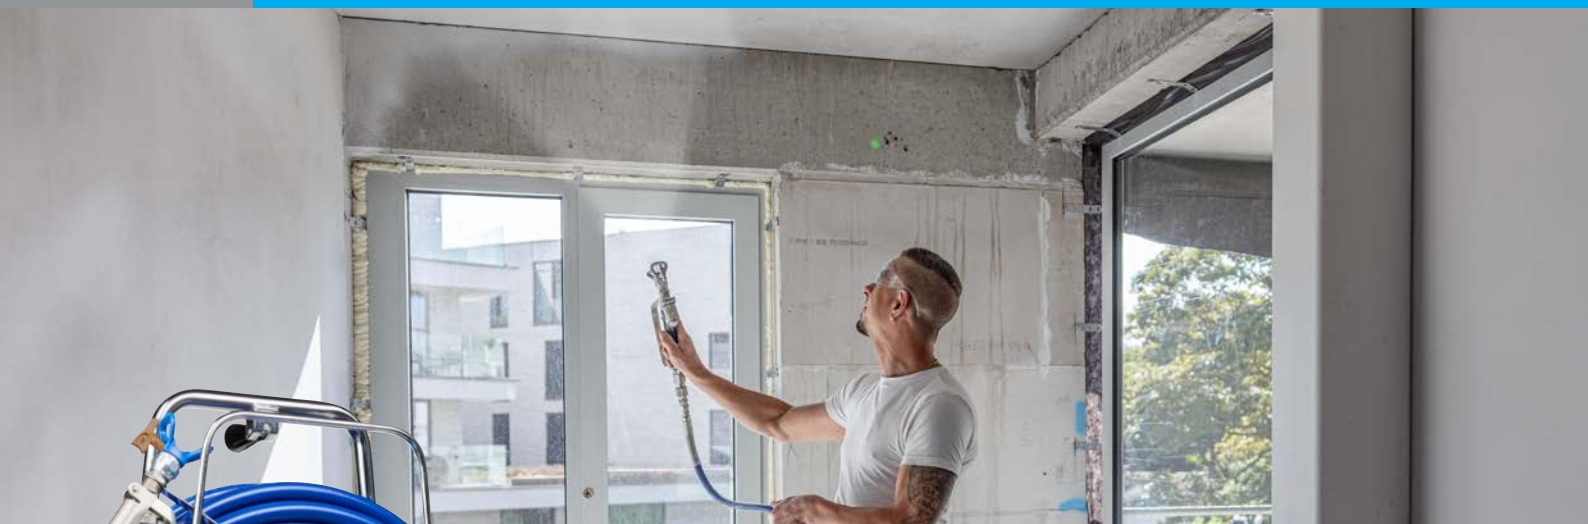

The next evolution in high-volume coating application—powered by XT Motor and AMPLIFI[™] Technology for gas-like performance from any standard outlet (230V or 110V*). Faster coverage, smoother finishes, and electric convenience without compromise.

BREAKTHROUGH PERFORMANCE FROM ANY OUTLET

Gas-level output from standard 230V or 110V* power.

MAXIMIZE CREW PRODUCTIVITY

Higher flow supports multiple guns and faster job completion.

LESS NOISE, MORE FLEXIBILITY

Quiet electric operation for indoor, occupied, and extended-hour work.

BUILT FOR HEAVY MATERIALS

Engineered to spray the toughest coatings - ideal for Q4 drywall finishing, plasters, joint compound, paints, primers and more!

Learn more
graco.com/MarkXV

10 GRACO
YEARS



GAS-LIKE POWER. ELECTRIC CONVENIENCE. BUILT FOR THE BIG JOBS.

XT MOTOR POWER

GAS-LIKE PERFORMANCE FROM ANY OUTLET

- High-torque, low-RPM design delivers consistent output for heavy materials
- Dual voltage flexibility: runs on 230V or 110V*
- Quiet electric operation for indoor, occupied, and extended-hour work

AMPLIFI™ TECHNOLOGY

MORE POWER, MORE PRODUCTIVITY

- Up to 50% more usable power from the same outlet
- Selectable amperage helps prevent nuisance tripping on any breaker

ENDURANCE™ VORTEX PUMP WITH PROCONNECT™

BUILT FOR UPTIME

- Oversized passages handle plaster, Q4 drywall finishing, joint compound, and heavy mixes with ease
- ProConnect lets you swap pumps in minutes to keep crews spraying

TURBOCLEAN™ AND WATCHDOG™

PROTECTION – CLEAN FAST AND PROTECT YOUR INVESTMENT

- Clean 3X faster using less fluid
- WatchDog automatically turns off your machine to help prevent costly damage



**BUILT FOR HIGH-VOLUME
APPLICATIONS. ENGINEERED
TO KEEP CREWS MOVING.**

Model	Country	Part No.
Mark XV XT Standard	CEE	18H403
	IT, CH, DK	18H404
	UK	18H407
Mark XV XT ProContractor	CEE	18H405
	IT, CH, DK	18H406
	UK	18H408

Max. Pressure	227 BAR (3300 PSI)
Max. Flow	10,6 LPM (2.8 GPM)
Max. Tip Size	.053"
Voltage Range	110V/230V Flex Voltage
Supported Materials	paint, plaster, drywall compound, intumescent fireproofing, primers and more

*for UK models only

Learn more
graco.com/MarkXV

10 GRACO
YEARS

